

Conceptual Design of Modular Chassis Jig of Student Competition Car

Heryoga Winarbawa^{1,*}

¹Department of Mechanical Engineering, Faculty of Science and Technology, Sanata Dharma University, Yogyakarta, Indonesia

**Corresponding Author: winarbawa@gmail.com*

(Received 28-05-2021; Revised 16-06-2021; Accepted 16-06-2021)

Abstract

Chassis jig is needed to ensure that the welded chassis components does not warp or deform during welding process. Through concept screening and concept scoring, multiple design of chassis jigs is narrowed down to next development process. This study aims to design a chassis jig for the fabrication of student car competition chassis. The desired result of this design process is chassis jig with the ability to manufacture a wide variety of student competition car chassis.

Keywords: Car, chassis, jig, fixture

1 Introduction

Students of mechanical engineering programs are often challenged to study implementations. Student competition is one of study implementations. Those competitions drive students to build something based on what they learn in class. Formula Student (FS), Shell Eco Marathon (SEM), Kompetisi Mobil Hemat Energi (KMHE), and Kompetisi Mobil Listrik Indonesia (KMLI) are examples where student need to build cars to compete.

Car chassis is the important thing to ensure vehicle stability and driver/passenger safety. There are several types of chassis, ladder frame, space frame, and monocoque. A lot of student teams apply space frame chassis for their cars. Space frame chassis is chosen due to simpler manufacturability and cost effectiveness.

Space frame chassis are manufactured by welding some of tubing. To ensure accuracy, space frame chassis materials are welded on chassis jig and several fixtures. Welding fixtures are typically the most common devices used to align and retain the various pieces for welding [1]. Some chassis jig on the market are using steel as their table top. Steel table top are usually coated with other material to prevent rust.

The scope of this study was limited to accommodate competition car chassis welding process. This study summarizes the design of chassis jig that accommodate several kind of chassis that suite for each competition.

2 Research Methodology

This study applied three stages of process as shown at Figure 1. The first stage is to collect all requirement measurement, such as, length, width, and height of car chassis based on technical rules for each competition. As the second stage, we recall that concept selection is the process of evaluating concepts with respect to customer needs and other criteria, comparing the relative strengths and weaknesses of the concepts, and selecting one or more concepts for further investigation, testing, or development [2]. Material selection criteria are limited to ease of manufacturing and assembly process, and rust resistance properties. The third stage is when chassis jig was design and some feature were added.

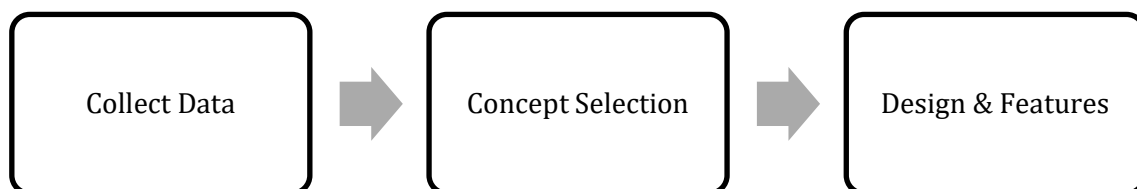


Figure 1. Study process

Collect Data. Car dimension can be found at technical data of each competition [3-5]. The KMHE competition adopts SEM environment, so basically the technical rules for car dimension are the same. Maximum dimension requirement are selected so the chassis that need to be manufactured doesn't break the competition rules. The closest car chassis CAD design for each type of competition are also collected to simulate availability on chassis jig top.

Concept Selection. A chassis jig is constructed by table top and some legs. Steel tube, hollow aluminum tube, and aluminum extrusion are the most common materials to build such thing. Concept A is bulky, heavy duty chassis jig constructed by square hollow steel as frame and thick steel sheet as table top. Concept B is knock-down slatted steel sheet as top, frame and some legs. Concept C is constructed by all aluminum extrusion. Concept D has steel sheet with welded ribs as table top, and bent steel sheet that constructed as frame. Concept E is assembled by welded square hollow steel and aluminum extrusion as table top. All of those concepts are narrowed down through concept screening which tabulated in Table 1.

Table 1. Concept screening

Selection Criteria	Concepts				
	A	B	C	D	E
Weight	-	-	0	+	-
Rust Resistant	-	0	0	0	0
Easy to Assemble	-	0	0	+	+
Manufacturing Cost	-	-	0	+	+
Fixture Modularity	+	+	0	0	0
Rigidity	+	+	0	-	+
Easy to Move	-	+	0	+	-
Sum +’s	2	3	0	4	3
Sum 0’s	0	2	7	2	2
Sum -’s	5	2	0	1	2
Net Score	-3	1	0	3	1
Rank	5	3	4	1	2
Continue?	No	Yes	Combine	Yes	Combine

Through concept screening, concept variation has been reduced to three concepts, Concept B, Concept D, and combination of Concept C and E, thus called Concept CE. Further investigated issue needs to be clarified before chosen final concept. Selection criteria are weighted to increase the sensitivity of concept determination as shown in Table 2.

Table 2. Concept scoring

	Weight	Concepts					
		B	CE		D		
Selection Criteria		Rating	Weighted Score	Rating	Weighted Score	Rating	Weighted Score
Weight	10%	2	0.2	4	0.4	5	0.5
Rust Resistant	15%	3	0.45	4	0.6	3	0.45
Easy to Assemble	10%	3	0.3	2	0.2	3	0.3
Manufacturing Cost	25%	1	0.25	3	0.75	4	1
Fixture Modularity	15%	4	0.6	4	0.6	3	0.45
Rigidity	20%	4	0.8	4	0.8	1	0.2
Easy to Move	5%	4	0.2	4	0.2	4	0.2
Total Score		2.8		3.55		3.1	
Rank		3		1		2	
Continue		No		Develop		No	

The total score for each concept is the sum of the weighted scores, and formulated as:

$$S_j = \sum_{i=1}^n r_{ij} w_i. \tag{1}$$

Here, r_{ij} is the raw rating of concept j for the i th criterion, w_i represents the weighting for i th criterion, n is the number of criteria, and S_j denotes the total score of concept j .

3 Results and Discussion

Chosen concept is combination of concept C and E. Concept CE is constructed by welded square hollow steel as bottom part of frame and slatted arrangement of aluminum extrusion as table top as shown in Figure 2a. From bottom part of frame to table top is raised by another aluminum extrusion. That configuration provide better stability as center gravity is lower. The lower part also useful for storing jigs/fixtures, welding equipment, and power tools that required during chassis fabrication. Figure 2b shows chassis jig with SEM prototype car chassis on top of it. For FS car chassis, some additional jig members were added to support front and back section of car chassis as shown in Figure 2c. Fixtures for holding chassis materials will be design as future work.



(a)



(b)



(c)

Figure 2. Some illustrations of chassis jigs: (a) Chassis jig, (b) Chassis jig with SEM prototype car chassis, (c) Chassis jig with FS car chassis

4 Conclusion

Concept CE has been concluded as best concept after several steps. The excellence of Concept CE amongst others are:

- **Lightweight:** using aluminum extrusion as the most component are reducing overall weight
- **Rust resistant:** aluminum is already rust resistant since it already provides oxide film all over the surface.
- **Easy to assemble:** aluminum extrusion provides tracks that has standardized dimensions and their own accessories such as nuts, bolts and connectors.

- **Low manufacturing cost:** since it already has tracks and accessories, fabricating process and assembly is just simply as cut and connect. It does not need complex manufacturing process on many machines.
- **Modular fixture:** lower fixture design are mainly based on aluminum extrusion track design, and the top one are following work piece design, that is, aluminum hollow tube for chassis.
- **Rigid enough:** aluminum extrusion cross-section is already designed to maintain rigidity along its length. Bigger cross-sectional area provides minimum deflection and maximum rigidity when they are made into a structure.
- **Easy to move:** since it is already lightweight because half part is using aluminum material, the movement also help by castor wheel.

Note that because this concept using aluminum as top, so it does not provide impact protection. Top surface is only used as planar reference and placing fixtures.

References

- [1] E. G. Hoffman, *Jig and Fixture*, 5th Edition, Clifton Park, NY: Delmar, 2004.
- [2] K.T. Ulrich and S.D Epingger, *Product Design and Development*, New York, NY: McGraw-Hill Education, 2016.
- [3] "Formula Student," [Online]. Available: <https://www.imeche.org/docs/default-source/1-oscar/formula-student/2021/forms/fs2020-rules.zip?sfvrsn=2>. [Accessed 24 March 2021].
- [4] "Shell Eco Marathon," [Online]. Available: https://base.makethefuture.shell/en_gb/service/api/home/shell-eco-marathon/global-rules/_jcr_content/root/content/document_listing/items/download_1733386233.stream/1598973488368/0e057b48fe5e2adc044ac860f83ebf26f8ccd5f9/shell-eco-marathon-2020-official-rul. [Accessed 24 March 2021].
- [5] "Kompetisi Mobil Listrik Indonesia," [Online]. Available: <http://kmli.polban.ac.id/component/phocadownload/category/1-panduan-lomba.html?download=6:panduan-kmli-xi-2019>. [Accessed 24 March 2021].